

ROYALOHM

SPECIFICATION FOR APPROVAL

TRELIK

Description : Carbon Film Fixed Resistors

Royalohm Part no.: CFR0W4JxxxxA50 (CR 1/4W +/- 5% PT-52mm.)

Approved by

Parts corresponding to RoHS Compliant: 2005-Apr.-1

Royal Electronic Factory (Thailand) Co., Ltd.

20/1-2 Moo 2 Klong-Na, Muang

Chachoengsao 24000, Thailand

Tel: +66-38-822404-8

Fax: +66 38-981190 / 823765

E-mail Address: Export sales: Export@royalohm.com

Local sales: Local@royalohm.com

<http://www.royalohm.com>

P.O. Box 251 Klongchan, Bangkok 10240, Thailand

Approved	Checked	Prepared
Mr. Jack Lin	Ms. S. Sakultala	Ms. I. Supakhinee

Issued Date: 2007/07/03

1. Scope:

This specification for approval relates to Carbon Film Fixed Resistors manufactured by ROYALOHM 's specifications.

2. Type designation:

The type designation shall be in the following form :

(Ex.)	CR	1/4W	J	10Ω
	Type	Power Rating	Resistance Tolerance	Nominal Resistance

3. Ratings:

Ratings shall be shown in the table 1.

Table 1

Type	CR
Rated Power	0.25 W at 70°C
Max. Working Voltage	250 V
Max. Overload Voltage	500 V
Dielectric Withstanding Voltage	500 V
Rated Ambient Temp.	70 °C
Operating Temp.Range.	-55°C --- +155°C
Resistance Tolerance	± 5 %
Resistance Range	1Ω----10MΩ

3.1 Power rating:

Resistors shall have a power rating based on continuous full load operation at an ambient temperature of 70 °C. For temperature in excess of 70 °C , the load shall be derated as shown in the figure 1.

3.2 Voltage rating:

Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating , as determined from the following formula :

$$RCWV = \sqrt{P \times R}$$

Were : RCWV = Rated DC or RMS AC continuous working voltage at commercial-line frequency and waveform (volt)


P = Power Rating (watt)

R = Nominal Resistance (ohm)

Carbon Film Fixed Resistors

In no case shall the rated DC or RMS AC continuous working voltage be greater than the applicable maximum value.


Figure 1.

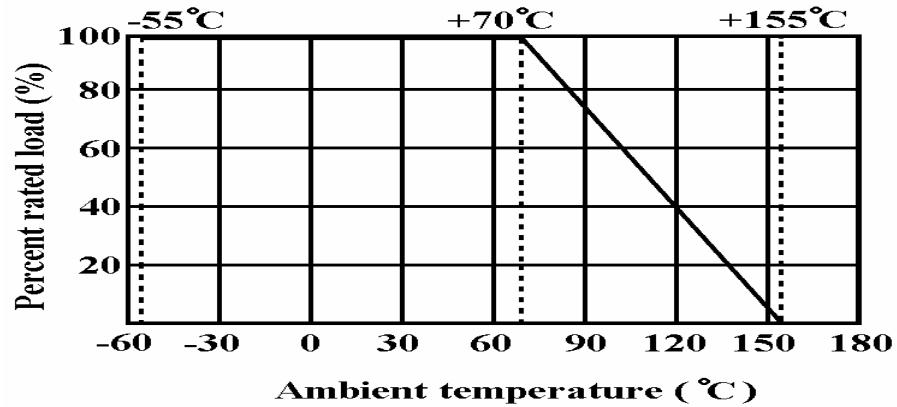

3.3 Nominal resistance :

Effective figures of nominal resistance shall be in accordance with E-24 series, and resistance tolerance shall be shown by table 1.

4. Construction :

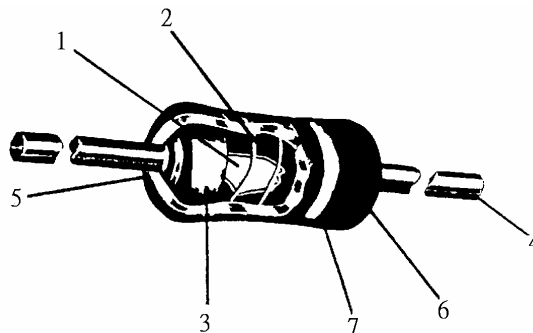

No.	Name	Material
1	Basic Body	Rod Type Ceramics
2	Resistance Film	Carbon Film
3	End Cap	Steel (Tin plated iron surface)
4	Lead Wire	Annealed copper wire coated with tin
5	Joint	By welding
6	Coating	Insulated epoxy resin (Color : Beige)
7	Color Code	Epoxy Resin

Carbon Film Fixed Resistors

5. Characteristics :

Characteristics	Limits	Test Methods (JIS C 5201-1)										
DC. Resistance	Must be within the specified tolerance.	5.1 The limit of error of measuring apparatus shall not exceed allowable range or 5% of resistance tolerance										
Temperature coefficient	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Resist. Range</th> <th style="text-align: center;">T.C.R. (PPM/°C)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">≤ 10 Ω</td> <td style="text-align: center;">0 ~ ±350</td> </tr> <tr> <td style="text-align: center;">11 Ω ~ 99K</td> <td style="text-align: center;">0 ~ -450</td> </tr> <tr> <td style="text-align: center;">100K ~ 1M</td> <td style="text-align: center;">0 ~ -700</td> </tr> <tr> <td style="text-align: center;">1.1M ~ 10M</td> <td style="text-align: center;">0 ~ -1500</td> </tr> </tbody> </table>	Resist. Range	T.C.R. (PPM/°C)	≤ 10 Ω	0 ~ ±350	11 Ω ~ 99K	0 ~ -450	100K ~ 1M	0 ~ -700	1.1M ~ 10M	0 ~ -1500	5.2 Natural resistance change per temp. degree centigrade. $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \quad (\text{PPM}/^\circ\text{C})$ R1: Resistance value at room temperature (t1) R2: Resistance value at room temp.plus 100°C (t2)
Resist. Range	T.C.R. (PPM/°C)											
≤ 10 Ω	0 ~ ±350											
11 Ω ~ 99K	0 ~ -450											
100K ~ 1M	0 ~ -700											
1.1M ~ 10M	0 ~ -1500											
Short time overload	Resistance change rate is ± (1 % + 0.05 Ω) Max. with no evidence of mechanical damage	5.5 Permanent resistance change after the application of a potential of 2.5 times RCWV for 5 seconds.										
Insulation Resistance	Insulation resistance is 10,000 MΩ Min	5.6 Resistors shall be clamped in the trough of a 90° metallic V-block and shall be tested at DC potential respectively specified in the above list for 60 +10/ -0 seconds.										
Dielectric withstanding voltage	No evidence of flashover mechanical damage, arcing or insulation break down.	5.7 Resistors shall be clamped in the trough of a 90° metallic V-block and shall be tested at AC potential respectively specified in the table 1. for 60 + 10/-0 seconds.										
Terminal strength	No evidence of mechanical damage.	6.1 Direct load : Resistance to a 2.5 kgs direct load for 10 secs. in the direction of the longitudinal axis of the terminal leads. Twist test : Terminal leads shall be bent through 90 ° at a point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations.										


Carbon Film Fixed Resistors

Carbon Film Fixed Resistors				
Characteristics	Limits	Test Methods (JIS C 5201-1)		
Resistance to soldering heat	Resistance change rate is $\pm (1\% + 0.05\Omega)$ Max. with no evidence of mechanical damage.	6.4 Permanent resistance change when leads immersed to 3.2 to 4.8 mm from the body in $350^{\circ}\text{C} \pm 10^{\circ}\text{C}$ solder for 3 ± 0.5 seconds		
Solderability	95 % coverage Min.	6.5 The area covered with a new , smooth clean , shiny and continuous surface free from concentrated pinholes. Test temp. of solder : $245^{\circ}\text{C} \pm 3^{\circ}\text{C}$ Dwell time in solder : 2 ~ 3 seconds		
Temperature cycling	Resistance change rate is $\pm (1\% + 0.05\Omega)$ Max. with no evidence of mechanical damage.	7.4 Resistance change after continuous 5 cycles for duty shown below:		
		Step	Temperature	Time
		1	$-55^{\circ}\text{C} \pm 3^{\circ}\text{C}$	30 mins
		2	Room temp.	10~15 mins
		3	$+155^{\circ}\text{C} \pm 2^{\circ}\text{C}$	30 mins
4	Room temp.	10~15 mins		
Load life in humidity	Resistance value		$\Delta R/R$	
	Normal Type	Less than $100\text{K}\Omega$	$\pm 3\%$	
		$100\text{K}\Omega$ or more	$\pm 5\%$	
		7.9 Resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") in a humidity test chamber controlled at $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and 90 to 95 % relative humidity		
Load life	Resistance value		$\Delta R/R$	
	Normal Type	Less than $56\text{K}\Omega$	$\pm 2\%$	
		$56\text{K}\Omega$ or more	$\pm 3\%$	
		7.10 Permanent resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") at $70^{\circ}\text{C} \pm 2^{\circ}\text{C}$ ambient		

Carbon Film Fixed Resistors

6. Dimension :


Unit : mm

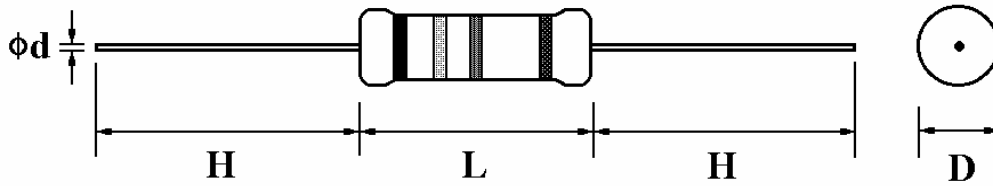

Type	Power Rating	D (Max.)	L (Max.)	d ± 0.05	H ± 3
CR	1/4W	2.5 mm	6.8 mm	0.54 mm	28 mm

Painting method:


Welding point, terminal and lead wire, is permissible to be exposed without the outer coated cover. The extent should be within 1/2 of the arc angle.

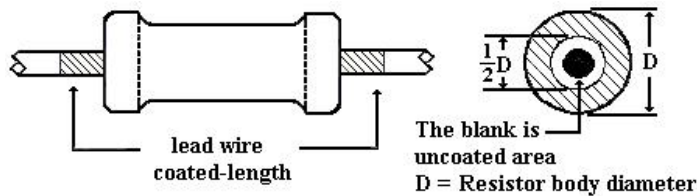

7. Marking :

7.1 Resistor :

Resistors shall be marked with color coding colors shall be in accordance with JIS C 0802

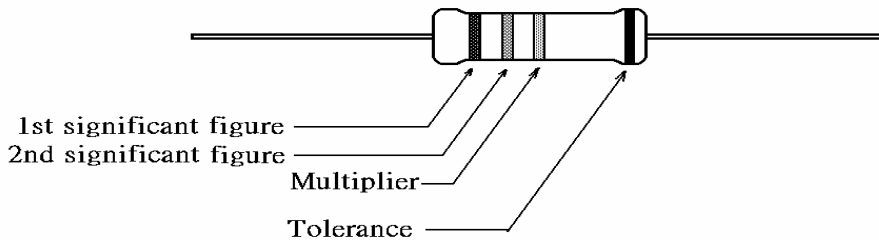

7.2 Label :

Label shall be marked with following items:

- (1) Order code
- (2) Type and Nominal resistance
- (3) Wattage and Resistance tolerance
- (4) Lot number and PPM
- (5) Quantity


Example :

Carbon Film Fixed Resistors			
Watt :	1/4W	Val :	10Ω
Q'TY :	5,000	Tol :	5%
Lot :	813478	PPM :	
	ROYALOHM		Pb Free

Carbon Film Fixed Resistors

8. Packing specification :


8.1 Taping dimension :

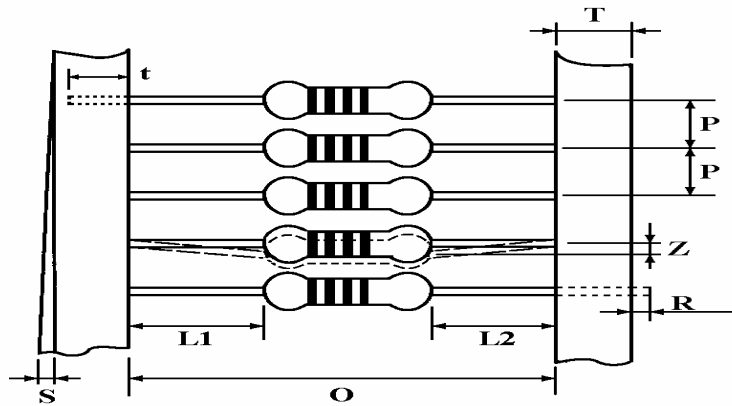

Dimensions (mm)

Type	Style	O	P	L1-L2	T	Z	R	t	S
CR-25	PT-52	52±1	5±0.3	1 Max.	6±1	1 Max.	0	4 ±1	0.5 Max.

8.2 Tape in box packing :

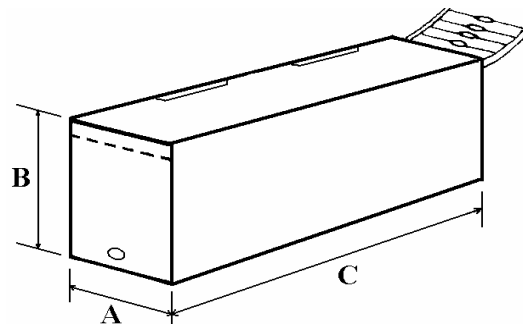

Bandoliers may also be contained in a cardboard box ("Ammopack")


Dimension (mm)

Type	Style	L (C) ±5	W (A) ±5	H (B) ±5	Quantity Per Box (pcs.)
CR-25	PT-52	250	75	96	5,000

"Ammopack" is an abbreviation of "ammunition pack"

Carbon Film Fixed Resistors

8.3 Tape on reel packing :

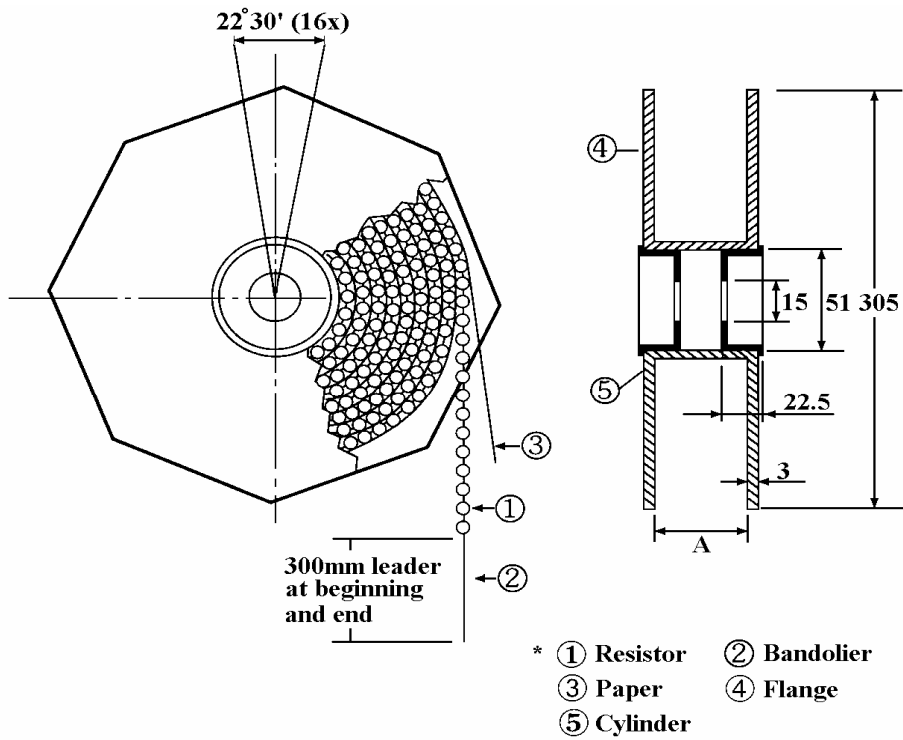


Dimension (mm) :

Type	Style	Across Flange (A)	Quantity Per Reel
CR-25	PT-52	73 ± 2	5,000 pcs.

Part Number System

Explanation of Part Number System (Carbon Film Fixed Resistors)

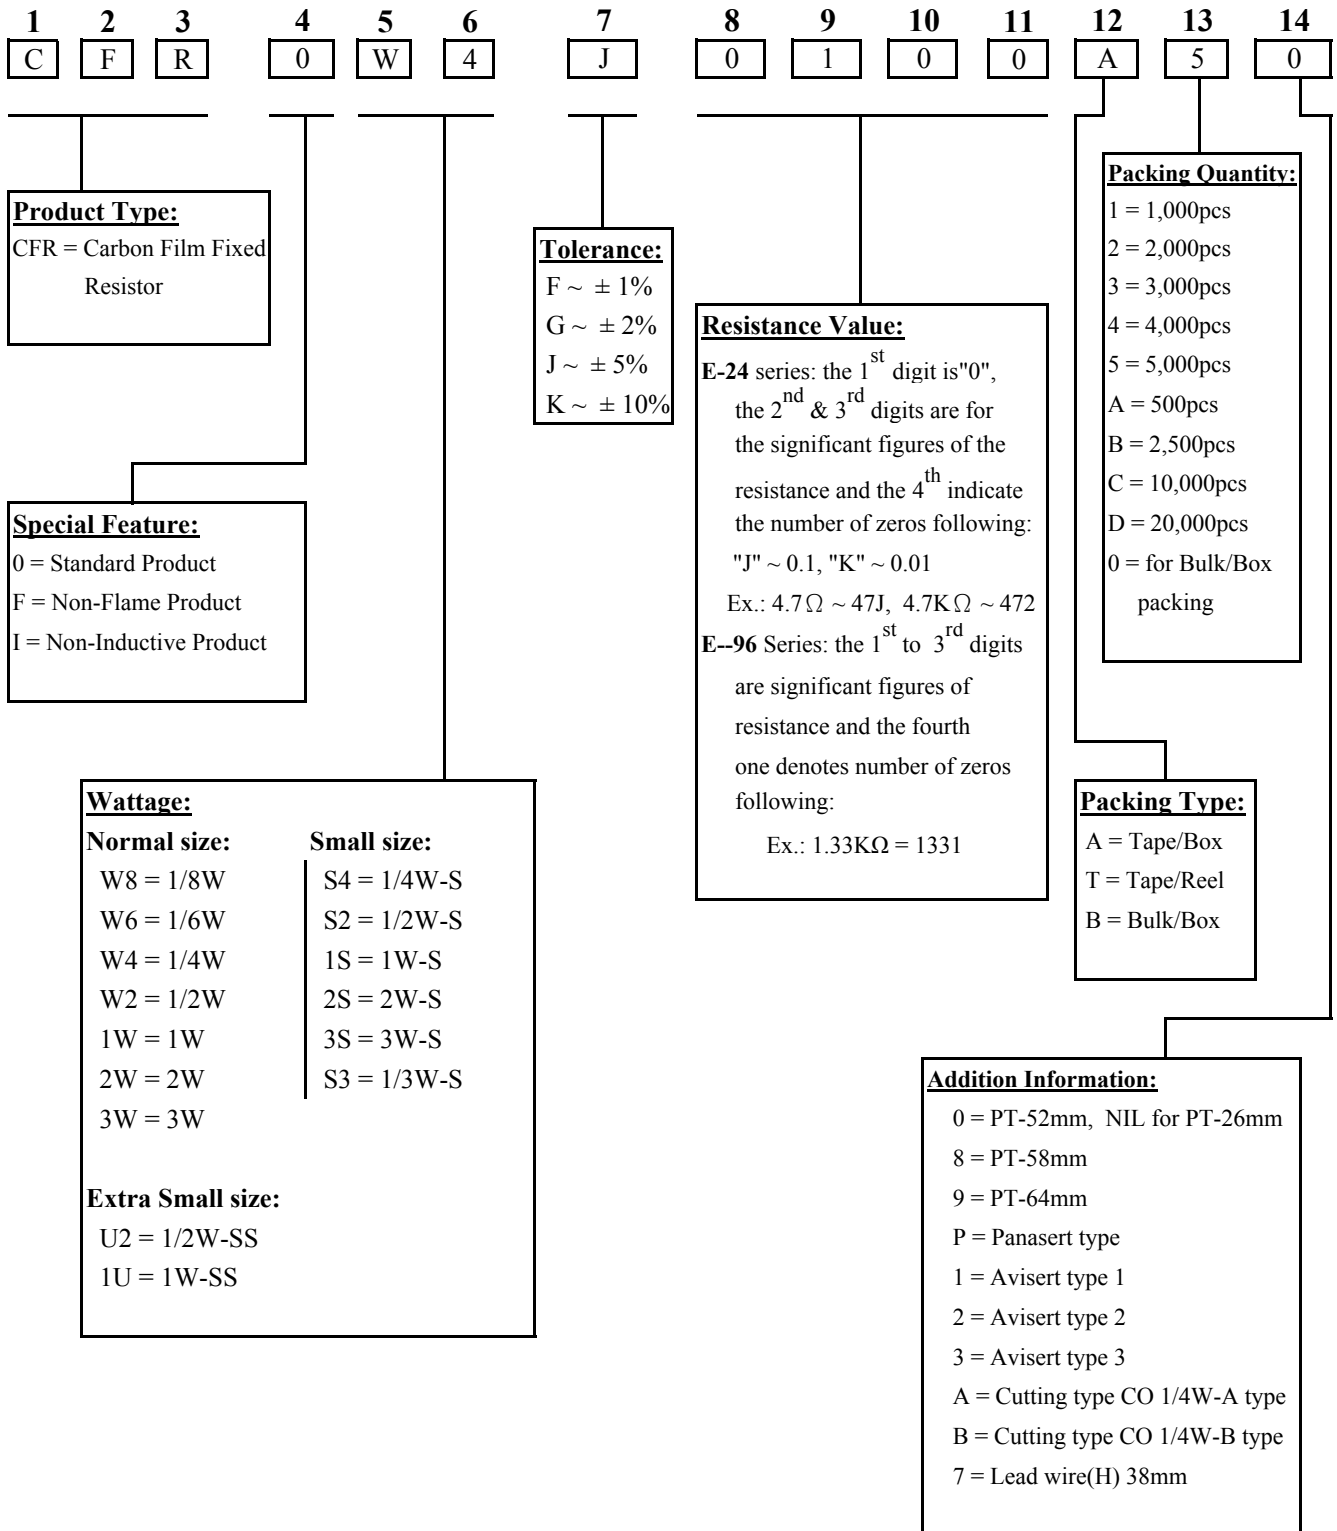

Sample: CR 1/4W +/- 5% 10Ω T/B 5,000 → CFR0W4J0100A50