

ROYALOHM

SPECIFICATION FOR APPROVAL

TRELIK COMERCIAL IMPORTADORA LTD.

Description : Carbon Film Fixed Resistors

Royalohm Part no.: CFRFU2JxxxxA50 (CR 1/2W-SS +/- 5% Non -Flame paint)

Approved by

Parts corresponding to RoHS Compliant: 2005-Apr.-1

Royal Electronic Factory (Thailand) Co., Ltd.

20/1-2 Moo 2 Klong-Na, Muang

Chachoengsao 24000, Thailand

Tel: +66-38-822404-8

Fax: +66 38-981190 / 823765

E-mail Address: Export sales: Export@royalohm.com

Local sales: Local@royalohm.com

<http://www.royalohm.com>

P.O. Box 251 Klongchan, Bangkok 10240, Thailand

Approved	Checked	Prepared
Mr. Jack Lin	Ms. S. Sakultala	Ms. T. Suparuch

Issued Date: 2008/05/31

CHANGE NOTIFICATION HISTORY

Version	Date of Version	History	Remark
1	03/11/2004	1. Resistance range: 1Ω---10MΩ	
		2. Non-Flame paint	
2	17/03/2005	Change from JIS C 5202 to JIS C 5201-1	
3	07/07/2005	Lead wire diameter: 0.54 ± 0.05 (Unit: mm)	

1. Scope:

This specification for approval relates to Carbon Film Fixed Resistors manufactured by ROYAL OHM 's specifications.

2. Type designation:

The type designation shall be in the following form :

(Ex.)	CR	1/2 W-SS	J	100Ω
	Type	Power Rating	Resistance Tolerance	Nominal Resistance

3. Ratings:

Ratings shall be shown in the table 1.

Table 1

Type	CR
Rated Power	0.5 W at 70□
Max. Working Voltage	250 V
Max. Overload Voltage	500 V
Dielectric Withstanding Voltage	250 V
Rated Ambient Temp.	70 □
Operating Temp.Range	-55□ -- +155□
Resistance Tolerance	± 5 %
Resistance Range	1Ω----10MΩ

Cautions for Storage & Application :

If the product storage operation does not control environment such as high Humidity the performance and solderability may badly effected

Suggest for Storage & Application : Humidity less than 45%RH.

3.1 Power rating:

Resistors shall have a power rating based on continuous full load operation at an ambient temperature of 70 □. For temperature in excess of 70 □ , the load shall be derated as shown in the figure 1.

3.2 Voltage rating:

Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating , as determined from the following formula :

$$RCWV = \sqrt{P \times R}$$

Were : RCWV = Rated DC or RMS AC continuous working voltage at commercial-line frequency and waveform (volt)


P = Power Rating (watt)

R = Nominal Resistance (ohm)

Carbon Film (Non-Flame) Fixed Resistors

In no case shall the rated DC or RMS AC continuous working voltage be greater than the applicable maximum value


Figure 1.

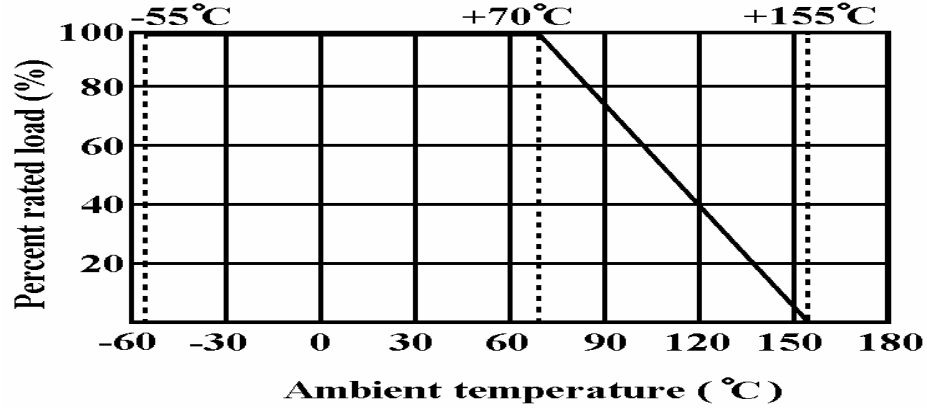

3.3 Nominal resistance :

Effective figures of nominal resistance shall be in accordance with E-24 series, and resistance tolerance shall be shown by table 1.

4. Construction :

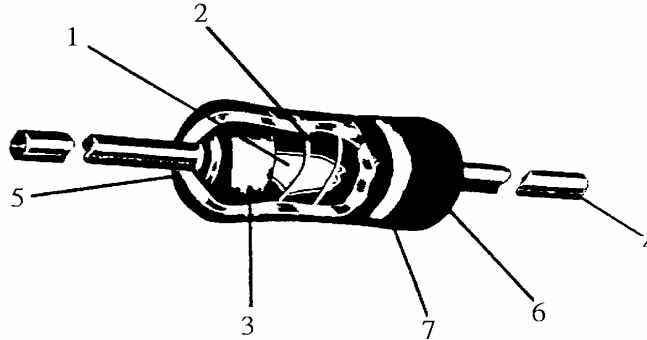

No.	Name	Material
1	Basic Body	Rod Type Ceramics
2	Resistance Film	Carbon Film
3	End Cap	Steel (Tin plated iron surface)
4	Lead Wire	Annealed copper wire coated with tin
5	Joint	By Welding
6	Coating	Insulated & Non-Flame paint (Color : Gray & Green mixed) meeting U L 94 V O standard
7	Color Code	Non -Flame Epoxy Resin

Carbon Film (Non-Flame) Fixed Resistors

5. Characteristics :

Characteristics	Limits		Test Methods (JIS C 5201-1)
DC. Resistance	Must be within the specified tolerance		5.1 The limit of error of measuring apparatus shall not exceed allowable range or 5% of resistance tolerance
Temperature coefficient	Resist. Range	T.C.R. (PPM/)	5.2 Natural resistance change per temp. degree centigrade. $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \quad (\text{PPM}/\square)$ R1: Resistance value at room temperature (t1) R2: Resistance value at room temp. plus 100° (t2)
Short time overload	Resistance change rate is $\pm (1\% + 0.05\Omega)$ Max. with no evidence of mechanical damage		5.5 Permanent resistance change after the application of a potential of 2.5 times RCWV for 5 seconds
Insulation Resistance	Insulation resistance is 20 MΩ Min.		5.6 Resistors shall be clamped in the trough of a 90° metallic V-block and shall be tested at DC potential respectively specified in the above list for 60 +10/ -0 seconds
Dielectric withstanding voltage	No evidence of flashover mechanical damage, arcing or insulation break down		5.7 Resistors shall be clamped in the trough of a 90° metallic V-block and shall be tested at AC potential respectively specified in the table 1. for 60 + 10/-0 seconds
Terminal strength	No evidence of mechanical damage		6.1 Direct load : Resistance to a 2.5 kgs direct load for 10 secs. in the direction of the longitudinal axis of the terminal leads Twist test : Terminal leads shall be bent through 90 ° at a point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations


Carbon Film (Non-Flame) Fixed Resistors

Characteristics	Limits	Test Methods (JIS C 5201-1)															
Resistance to soldering heat	Resistance change rate is $\pm (1\% + 0.05\Omega)$ Max. with no evidence of mechanical damage	6.4 Permanent resistance change when leads immersed to 3.2 to 4.8 mm from the body in $350\text{ } \square \pm 10 \text{ } \square$ solder for 3 ± 0.5 seconds															
Solderability	95 % coverage Min.	6.5 The area covered with a new, smooth clean , shiny and continuous surface free from concentrated pinholes. Test temp. of solder : $245\text{ } \square \pm 3\text{ } \square$ Dwell time in solder : 2 ~ 3 seconds															
Temperature cycling	Resistance change rate is $\pm (1\% + 0.05\Omega)$ Max. with no evidence of mechanical damage	7.4 Resistance change after continuous 5 cycles for duty shown below: <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Step</th> <th style="text-align: center;">Temperature</th> <th style="text-align: center;">Time</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">$-55\text{ } \square \pm 3\text{ } \square$</td> <td style="text-align: center;">30 mins</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">Room temp.</td> <td style="text-align: center;">10 \square 15 mins</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">$+155\text{ } \square \pm 2\text{ } \square$</td> <td style="text-align: center;">30 mins</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">Room temp.</td> <td style="text-align: center;">10 \square 15 mins</td> </tr> </tbody> </table>	Step	Temperature	Time	1	$-55\text{ } \square \pm 3\text{ } \square$	30 mins	2	Room temp.	10 \square 15 mins	3	$+155\text{ } \square \pm 2\text{ } \square$	30 mins	4	Room temp.	10 \square 15 mins
Step	Temperature	Time															
1	$-55\text{ } \square \pm 3\text{ } \square$	30 mins															
2	Room temp.	10 \square 15 mins															
3	$+155\text{ } \square \pm 2\text{ } \square$	30 mins															
4	Room temp.	10 \square 15 mins															
Load life in humidity	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Resistance value</th> <th style="text-align: center;">\squareR/R</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">Non-Flame type \square 100KΩ</td> <td style="text-align: center;">$\pm 5 \%$</td> </tr> <tr> <td style="text-align: center;">\square 100KΩ</td> <td style="text-align: center;">$\pm 10 \%$</td> </tr> </tbody> </table>	Resistance value	\square R/R	Non-Flame type \square 100K Ω	$\pm 5 \%$	\square 100K Ω	$\pm 10 \%$	7.9 Resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") in a humidity test chamber controlled at $40\text{ } \square \pm 2\text{ } \square$ and 90 to 95 % relative humidity									
Resistance value	\square R/R																
Non-Flame type \square 100K Ω	$\pm 5 \%$																
\square 100K Ω	$\pm 10 \%$																
Load life	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Resistance value</th> <th style="text-align: center;">\squareR/R</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">Non-Flame type \square 100KΩ</td> <td style="text-align: center;">$\pm 5 \%$</td> </tr> <tr> <td style="text-align: center;">\square 100KΩ</td> <td style="text-align: center;">$\pm 10 \%$</td> </tr> </tbody> </table>	Resistance value	\square R/R	Non-Flame type \square 100K Ω	$\pm 5 \%$	\square 100K Ω	$\pm 10 \%$	7.10 Permanent resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") at $70\text{ } \square \pm 2\text{ } \square$ ambient									
Resistance value	\square R/R																
Non-Flame type \square 100K Ω	$\pm 5 \%$																
\square 100K Ω	$\pm 10 \%$																

Carbon Film Fixed Resistors

6. Dimension :


Unit: mm

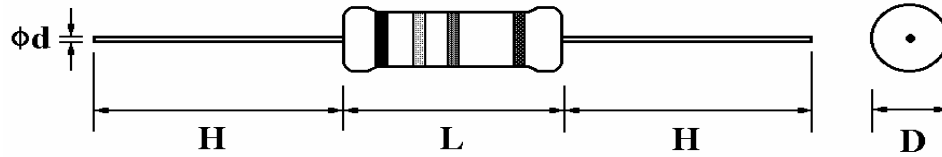

Type	Power Rating	D (Max.)	L (Max.)	d ± 0.05	H ± 3
CR	1/2 W-SS	2.5mm	6.8 mm	0.54 mm	28 mm

Painting method:


Welding point, terminal and lead wire, is permissible to be exposed without the outer coated cover. The extent should be within 1/2 of the arc angle.

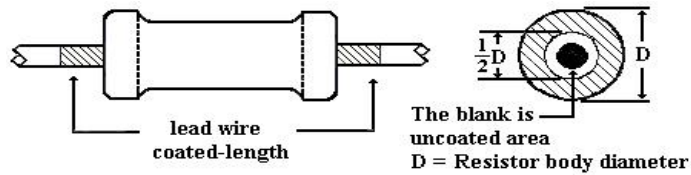

7. Marking :

7.1 Resistor :

Resistors shall be marked with color coding
 colors shall be in accordance with JIS C 0802

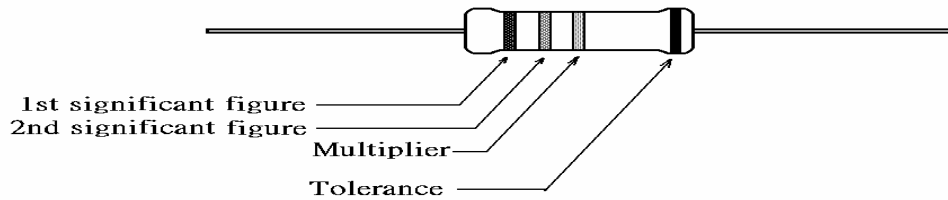

7.2 Label :

Label shall be marked with following items:


- (1) Type and style
- (2) Nominal resistance
- (3) Resistance tolerance
- (4) Quantity
- (5) Lot number
- (6) PPM

Example :	Carbon Film Fixed Resistors	
Watt :	1/2W-SS	Val : 100E
Q'TY :	5,000	Tol : 5%
Lot :	813478	PPM :
	ROYALOHM	Pb Free

Carbon Film (Non-Flame) Fixed Resistors

8. Packing specification :


8.1 Taping dimension :

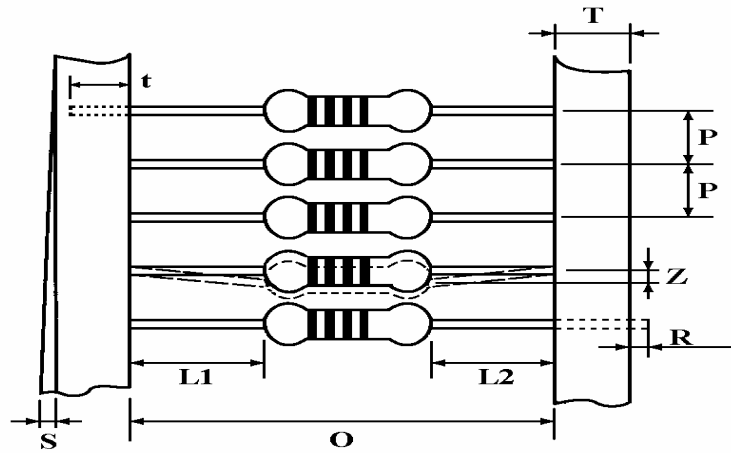

Dimensions (mm)

Type	Style	O	P	L1-L2	T	Z	R	t	S
CR-50-SS	PT-52	52±1	5±0.3	1 Max.	6±1	1 Max.	0	4±1	0.5 Max.

8.2 Tape in box packing :

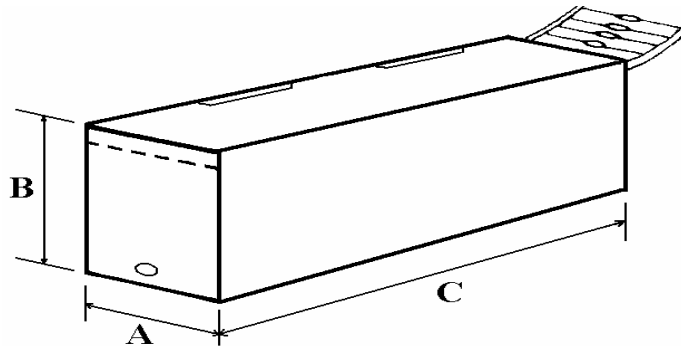

Bandoliers may also be contained in a cardboard box ("Ammopack")


Dimension (mm)

Type	Style	L (C) ± 5	W (A) ± 5	H (B) ± 5	Quantity Per Box (pcs.)
CR-50-SS	PT-52	250	75	96	5,000

"Ammopack" is an abbreviation of "ammunition pack"

Carbon Film (Non-Flame) Fixed Resistors

8.3 Tape on reel packing :

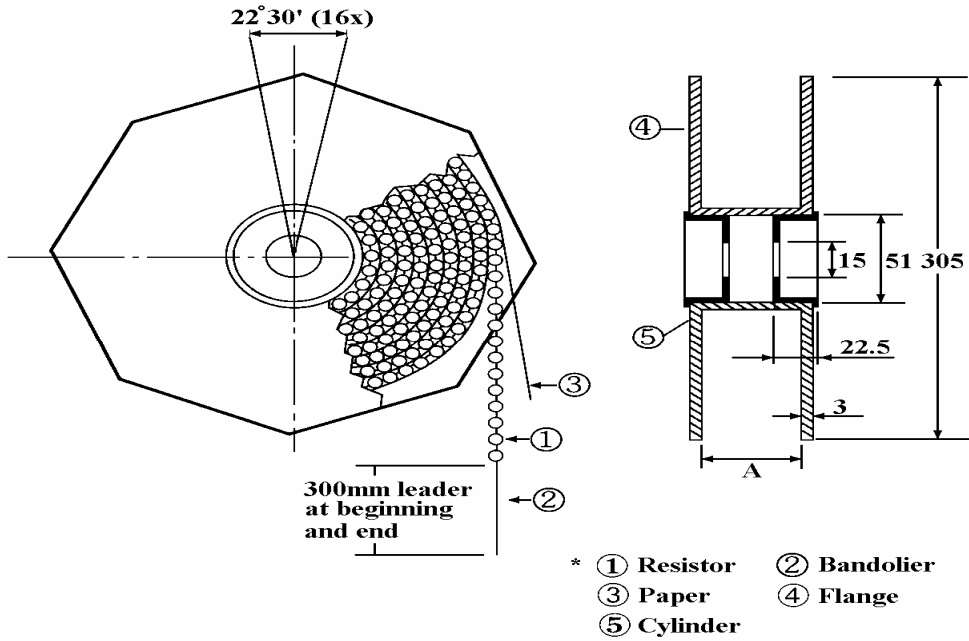

Dimension (mm) :

Type	Style	Across Flange (A)	Quantity Per Reel
CR-50-SS	PT-52	73 ± 2	5,000 pcs.

Part Number System

Explanation of Part Number System (Carbon Film Fixed Resistors)

1 2 3 4 5 6 7 8 9 10 11 12 13 14
 C F R F U 2 J 0 1 0 1 A 5 0

Product Type:
 CFR = Carbon Film Fixed Resistor

Special Feature:
 0 = Standard Product
 F = Non-Flame Product
 I = Non-Inductive Product

Wattage:

Normal size:	Small size:
W8 = 1/8W	S4 = 1/4W-S
W6 = 1/6W	S2 = 1/2W-S
W4 = 1/4W	1S = 1W-S
W2 = 1/2W	2S = 2W-S
1W = 1W	3S = 3W-S
2W = 2W	S3 = 1/3W-S
3W = 3W	
Extra Small size:	
U2 = 1/2W-SS	

Tolerance:
 F ~ ± 1%
 G ~ ± 2%
 J ~ ± 5%
 K ~ ± 10%

Resistance Value:
E-24 series: the 1st digit is "0", the 2nd & 3rd digits are for the significant figures of the resistance and the 4th indicate the number of zeros following:
 "J" ~ 0.1, "K" ~ 0.01
 Ex.: 4.7Ω ~ 47J, 4.7KΩ ~ 472
E--96 Series: the 1st to 3rd digits are significant figures of resistance and the fourth one denotes number of zeros following:
 Ex.: 1.33KΩ = 1331

Packing Quantity:
 1 = 1,000pcs
 2 = 2,000pcs
 3 = 3,000pcs
 4 = 4,000pcs
 5 = 5,000pcs
 A = 500pcs
 B = 2,500pcs
 C = 10,000pcs
 D = 20,000pcs
 0 = for Bulk/Box packing

Packing Type:
 A = Tape/Box
 T = Tape/Reel
 B = Bulk/Box

Addition Information:
 0 = PT-52mm, NIL for PT-26mm
 8 = PT-58mm
 9 = PT-64mm
 P = Panasert type
 1 = Avisert type 1
 2 = Avisert type 2
 3 = Avisert type 3
 A = Cutting type CO 1/4W-A type
 B = Cutting type CO 1/4W-B type
 7 = Lead wire(H) 38mm

Sample: CR 1/2W-SS +/- 5% 100Ω T/B 5,000 → CFRFU2J0101A50