

# ROYALOHM

## SPECIFICATION FOR APPROVAL

### TRELIK

Description : Carbon Film Fixed Resistors

(Tin plated copper steel lead wire H=28mm)

Customer Part no.: CTO0S3JxxxxT50 (CR 1/3W-S +/- 5% T/R 5,000)

Approved by

**Parts corresponding to RoHS Compliant: 2005-Apr.-1**

Royal Electronic Factory (Thailand) Co., Ltd.

20/1-2 Moo 2 Klong-Na, Muang

Chachoengsao 24000, Thailand

Tel: +66-38-822404-8

Fax: +66 38-981190 / 823765

E-mail Address: Export sales: Export@royalohm.com

Local sales: Local@royalohm.com

<http://www.royalohm.com>

P.O. Box 251 Klongchan, Bangkok 10240, Thailand

Approved	Checked	Prepared
Mr. Jack Lin	Ms. S. Sakultala	Ms.T. Suparuch

Issue Date: 2007/11/16



## 1. Scope:

This specification for approval relates to Carbon Film Fixed Resistors manufactured by ROYAL OHM 's specifications.

## 2. Type designation:

The type designation shall be in the following form :

(Ex.)	<u>CR</u>	<u>1/3W-S</u>	<u>J</u>	<u>68KΩ</u>
	Type	Power Rating	Resistance Tolerance	Nominal Resistance

## 3. Ratings:

Ratings shall be shown in the table 1.

Table 1

Type	CR
Rated Power	0.33W at 70 °C
Max. Working Voltage	300 V
Max. Overload Voltage	600 V
Dielectric Withstanding Voltage	500 V
Rated Ambient Temp.	70 °C
Operating Temp.Range.	-55°C --- +155°C
Resistance Tolerance	± 5 %
Resistance Range	1Ω----10MΩ

## 3.1 Power rating:

Resistors shall have a power rating based on continuous full load operation at an ambient temperature of 70 °C. For temperature in excess of 70 °C , the load shall be derated as shown in the figure 1.

## 3.2 Voltage rating:

Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating , as determined from the following formula :

$$RCWV = \sqrt{P \times R}$$

Were : RCWV = Rated DC or RMS AC continuous working voltage at commercial-line frequency and waveform (volt)


P = Power Rating (watt)

R = Nominal Resistance (ohm)

## Carbon Film Fixed Resistors

In no case shall the rated DC or RMS AC continuous working voltage be greater than the applicable maximum value.


Figure 1.

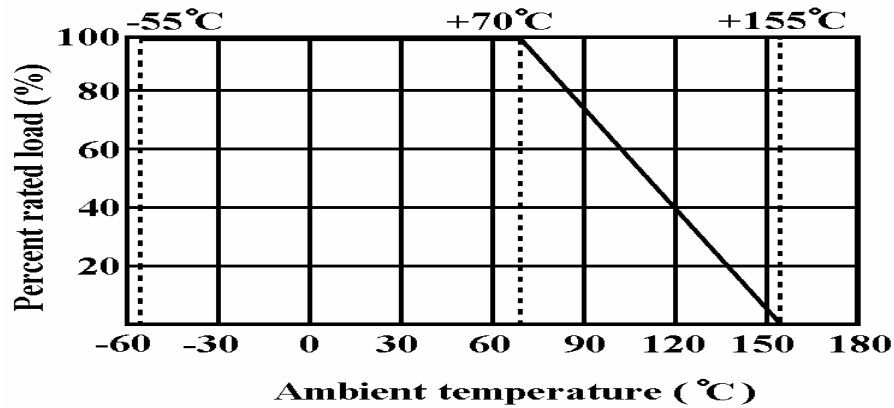

### 3.3 Nominal resistance :

Effective figures of nominal resistance shall be in accordance with E-24 series, and resistance tolerance shall be shown by table 1.

### 4. Construction :

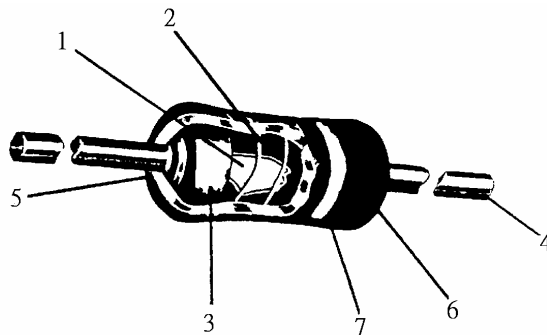

No.	Name	Material
1	Basic Body	Rod Type Ceramics
2	Resistance Film	Carbon Film
3	End Cap	Steel (Tin plated iron surface)
4	Lead Wire	Tin plated copper steel lead wire
5	Joint	By welding
6	Coating	Insulated resin ( Color : Beige )
7	Color Code	Epoxy Resin

## Carbon Film Fixed Resistors

### 5. Characteristics :

Characteristics	Limits	Test Methods ( JIS C 5201-1 )										
DC. Resistance	Must be within the specified tolerance.	5.1 The limit of error of measuring apparatus shall not exceed allowable range or 5% of resistance tolerance										
Temperature coefficient	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Resist. Range</th> <th style="text-align: center;">T.C.R. (PPM/°C)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">≤ 10 Ω</td> <td style="text-align: center;">0 ~ ±350</td> </tr> <tr> <td style="text-align: center;">11 Ω ~ 99K</td> <td style="text-align: center;">0 ~ -450</td> </tr> <tr> <td style="text-align: center;">100K ~ 1M</td> <td style="text-align: center;">0 ~ -700</td> </tr> <tr> <td style="text-align: center;">1.1M ~ 10M</td> <td style="text-align: center;">0 ~ -1500</td> </tr> </tbody> </table>	Resist. Range	T.C.R. (PPM/°C)	≤ 10 Ω	0 ~ ±350	11 Ω ~ 99K	0 ~ -450	100K ~ 1M	0 ~ -700	1.1M ~ 10M	0 ~ -1500	5.2 Natural resistance change per temp. degree centigrade. $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \quad (\text{PPM}/^\circ\text{C})$ R1: Resistance value at room temperature (t1) R2: Resistance value at room temp.plus 100°C (t2)
Resist. Range	T.C.R. (PPM/°C)											
≤ 10 Ω	0 ~ ±350											
11 Ω ~ 99K	0 ~ -450											
100K ~ 1M	0 ~ -700											
1.1M ~ 10M	0 ~ -1500											
Short time overload	Resistance change rate is ± (1 % + 0.05 Ω) Max. with no evidence of mechanical damage	5.5 Permanent resistance change after the application of a potential of 2.5 times RCWV for 5 seconds.										
Insulation Resistance	Insulation resistance is 10,000 MΩ Min	5.6 Resistors shall be clamped in the trough of a 90° metallic V-block and shall be tested at DC potential respectively specified in the above list for 60 +10/ -0 seconds.										
Dielectric withstanding voltage	No evidence of flashover mechanical damage, arcing or insulation break down.	5.7 Resistors shall be clamped in the trough of a 90° metallic V-block and shall be tested at AC potential respectively specified in the table 1. for 60 + 10/-0 seconds.										
Terminal strength	No evidence of mechanical damage.	6.1 <b>Direct load :</b> Resistance to a 2.5 kgs direct load for 10 secs. in the direction of the longitudinal axis of the terminal leads. <b>Twist test :</b> Terminal leads shall be bent through 90 ° at a point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations.										


## Carbon Film Fixed Resistors

Carbon Film Fixed Resistors					
Characteristics	Limits		Test Methods ( JIS C 5201-1 )		
Resistance to soldering heat	Resistance change rate is $\pm (1\% + 0.05 \Omega)$ Max. with no evidence of mechanical damage.		6.4 Permanent resistance change when leads immersed to 3.2 to 4.8 mm from the body in $350^\circ\text{C} \pm 10^\circ\text{C}$ solder for $3 \pm 0.5$ seconds		
Solderability	95 % coverage Min.		6.5 The area covered with a new , smooth clean , shiny and continuous surface free from concentrated pinholes. Test temp. of solder : $245^\circ\text{C} \pm 3^\circ\text{C}$ Dwell time in solder : 2 ~ 3 seconds		
Temperature cycling	Resistance change rate is $\pm (1\% + 0.05 \Omega)$ Max. with no evidence of mechanical damage.		7.4 Resistance change after continuous 5 cycles for duty shown below:		
			<b>Step</b>	<b>Temperature</b>	<b>Time</b>
			1	$-55^\circ\text{C} \pm 3^\circ\text{C}$	30 mins
			2	Room temp.	10~15 mins
			3	$+155^\circ\text{C} \pm 2^\circ\text{C}$	30 mins
			4	Room temp.	10~15 mins
Load life in humidity	<b>Resistance value</b>		7.9 Resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") in a humidity test chamber controlled at $40^\circ\text{C} \pm 2^\circ\text{C}$ and 90 to 95 % relative humidity		
	Normal Type	Less than $100\text{K}\Omega$		$\Delta R/R$ $\pm 3\%$	
		100K $\Omega$ or more		$\pm 5\%$	
Load life	<b>Resistance value</b>		7.10 Permanent resistance change after 1,000 hours operating at RCWV with duty cycle of ( 1.5 hours "on", 0.5 hour "off" ) at $70^\circ\text{C} \pm 2^\circ\text{C}$ ambient		
	Normal Type	Less than $56\text{K}\Omega$		$\Delta R/R$ $\pm 2\%$	
		56K $\Omega$ or more		$\pm 3\%$	

## Carbon Film Fixed Resistors

6. Dimension :


Unit: mm

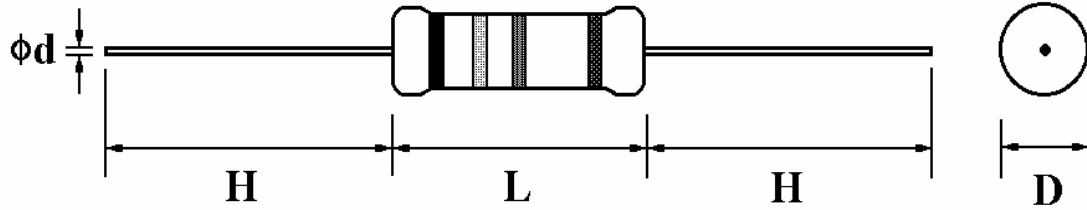

Type	Power Rating	D (Max.)	L (Max.)	d ± 0.02	H ± 3
CR	1/3W-S	2.5 mm	6.8 mm	0.5 mm	28 mm

Painting method:


Welding point, terminal and lead wire, is permissible to be exposed without the outer coated cover. The extent should be within 1/2 of the are angle.

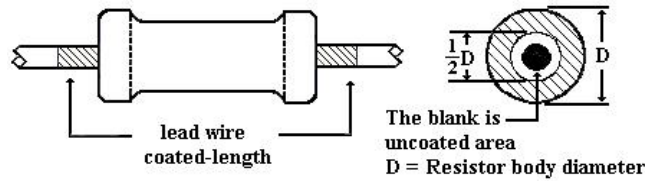

7. Marking :

7.1 Resistor :

Resistors shall be marked with color coding colors shall be in accordance with JIS C 0802

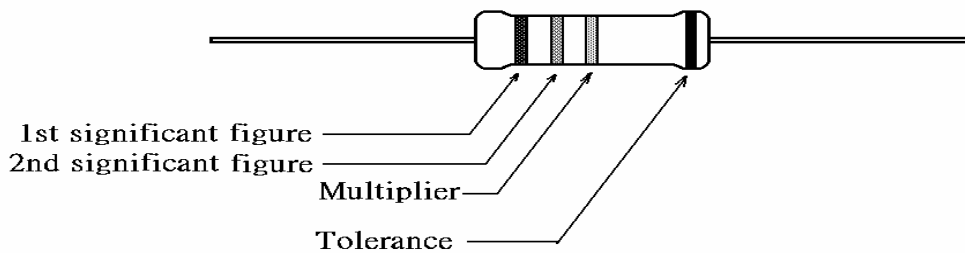

7.2 Label :

Label shall be marked with following items:

- (1) Type and style
- (2) Nominal resistance
- (3) Resistance tolerance
- (4) Quantity
- (5) Lot number
- (6) PPM


Example :

Carbon Film Fixed Resistors			
Watt :	1/3W-S	Val :	68K
Q'TY :	5,000	Tol :	5%
Lot :	813478	PPM :	
	ROYALOHM		Pb-Free

## Carbon Film Fixed Resistors

### 8. Packing specification :


#### 8.1 Taping dimension :

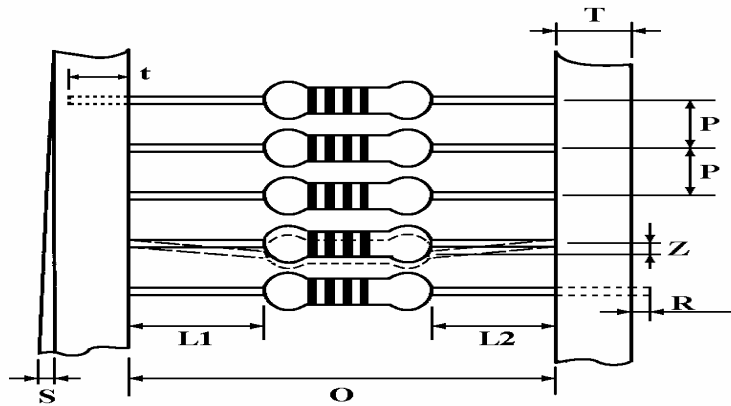

Dimensions (mm)

Type	Style	O	P	L1-L2	T	Z	R	t	S
CR-33s	PT-52	52±1	5±0.3	1 Max.	6±1	1 Max.	0	4 ±1	0.5 Max.

#### 8.2 Tape in box packing :

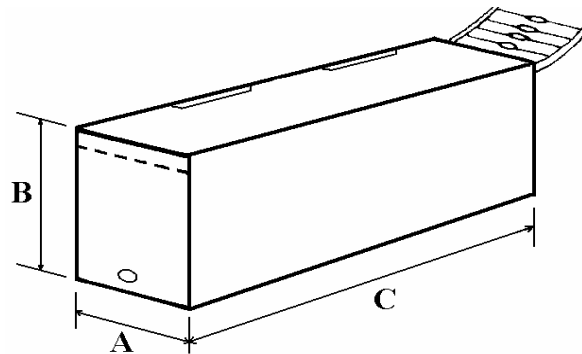

Bandoliers may also be contained in a cardboard box ("Ammopack")

Dimension (mm)


Type	Style	L (C) ±5	W (A) ±5	H (B) ±5	Quantity Per Box (pcs.)
CR-33s	PT-52	250	75	96	5,000

"Ammopack" is an abbreviation of "ammunition pack"



## Carbon Film Fixed Resistors

### 8.3 Tape on reel packing :

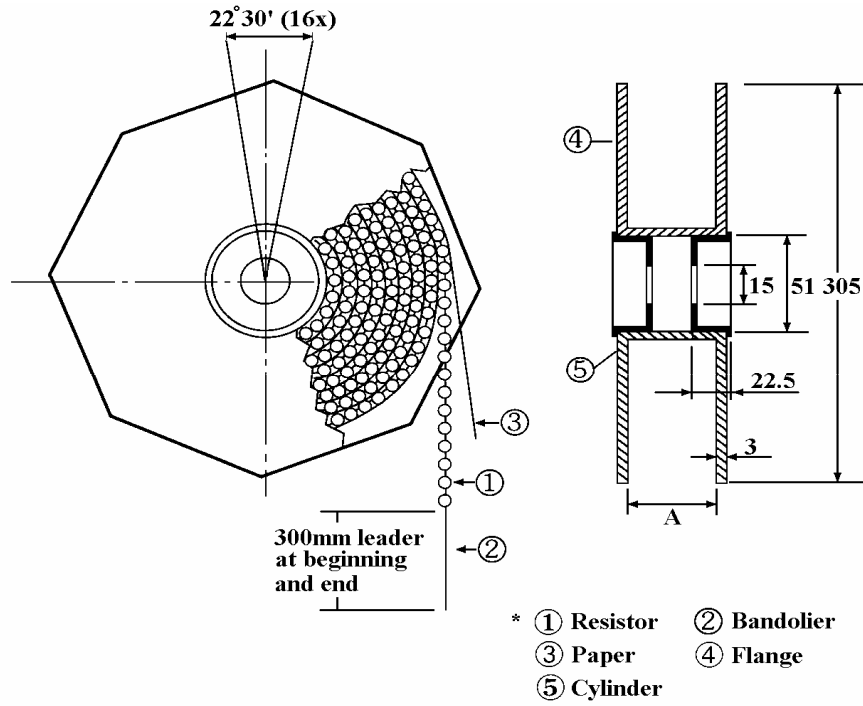


Dimension (mm) :

Type	Style	Across Flange (A)	Quantity Per Reel
CR-33s	PT-52	$73 \pm 2$	5,000 pcs.

# Part Number System

## Explanation of Part Number System Carbon Film Fixed Resistors



**Product Type:**

**CPO** = Copper plated steel lead wire, H=28mm  
**CPL** = Copper plated steel lead wire, H=38mm  
**COT** = Cutting type (Tin-Plate Cap)  
**CON** = Cutting type (Nickel Plate Cap)  
**CTO** = Tin Copper plated steel lead wire, H=28mm  
**CTL** = Tin Copper plated steel lead wire, H=38mm

**Tolerance:**

G ~ ± 2%  
 J ~ ± 5%  
 K ~ ± 10%

**Packing Type:**

A = Tape/Box  
 T = Tape/Reel  
 B = Bulk/Box  
 "B"(B/B) is the only available packing for Cutting type.

**Resistance Value:**

**E-24 series:** the 1<sup>st</sup> digit is "0", the 2<sup>nd</sup> & 3<sup>rd</sup> digits are for the significant figures of the resistance and the 4<sup>th</sup> indicate the number of zeros following:  
 "J" ~ 0.1, "K" ~ 0.01  
 Ex.: 4.7Ω ~ 47J, 4.7KΩ ~ 472

**Packing Quantity:**

1 = 1,000pcs  
 2 = 2,000pcs  
 3 = 3,000pcs  
 4 = 4,000pcs  
 5 = 5,000pcs  
 A = 500pcs  
 B = 2,500pcs  
 0 = for Bulk/Box packing

**Special Feature:**

0 = Standard Product  
 F = Non-Flame Product  
 1 = Non-Inductive Product

**Wattage:**

<b>Normal size:</b> W8 = 1/8W W4 = 1/4W W3 = 1/3W	<b>Small size:</b> S4 = 1/4W-S S3 = 1/3W-S S2 = 1/2W-S
--	---

**Addition Information:**

0 = For CP / CT type  
 A = Cutting type ( CO-25-A )  
 B = Cutting type ( CO-25-B )

Sample: CR 1/3W-S (Tin plated copper steel lead wire, H=28mm) +/- 5% 68KΩ T/R 5,000 → CTO0S3J0683T50