

ROYALOHM

SPECIFICATION FOR APPROVAL

TRELIK

Description : Wire-Wound Fixed Resistors

Royalohm Part no.: KNP02SJxxxxA10 (KNP 2W-S +/- 5% PT-52mm.)

Approved by

Parts corresponding to RoHS Compliant: 2005-Apr.-1

Royal Electronic Factory (Thailand) Co., Ltd.
20/1-2 Moo 2 Klong-Na, Muang
Chachoengsao 24000, Thailand
Tel: +66-38-822404-8
Fax: +66 38-981190 / 823765
E-mail Address : Export sales: Export@royalohm.com
Local sales: Local@royalohm.com
<http://www.royalohm.com>
P.O. Box 251 Klongchan, Bangkok 10240, Thailand

Approved	Checked	Prepared
Mr. Jack Lin	Ms. S. Sakultala	Ms. T. Suparuch

Issued Date: 2007/10/03

1. Scope:

This specification for approval relates to Wire-Wound Fixed Resistors manufactured by ROYALOHM 's specifications.

2. Type designation:

The type designation shall be in the following form :

(Ex.)	<u>KNP</u>	<u>2W-S</u>	<u>J</u>	<u>10Ω</u>
	Type	Power Rating	Resistance Tolerance	Nominal Resistance

3. Ratings:

Ratings shall be shown in the table 1.

Table 1

Type	KNP
Rated Power	2W at 70°C
Max. Working Voltage	500 V
Max. Overload Voltage	1000 V
Dielectric Withstanding Voltage	500 V
Rated Ambient Temp.	70 °C
Operating Temp. Range	-55°C --- +155°C
Resistance Tolerance	± 5 %
Resistance Range	0.1 Ω ----50 Ω

3.1 Power rating:

Resistors shall have a power rating based on continuous full load operation at an ambient temperature of 70 °C. For temperature in excess of 70 °C , the load shall be derated as shown in the figure 1.

3.2 Voltage rating:

Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating , as determined from the following formula :

$$RCWV = \sqrt{P \times R}$$

Were : RCWV = Rated DC or RMS AC continuous working voltage at commercial-line frequency and waveform (volt)


P = Power Rating (watt)

R = Nominal Resistance (ohm)

Wire-Wound Fixed Resistors

In no case shall the rated DC or RMS AC continuous working voltage be greater than the applicable maximum value


Figure 1.

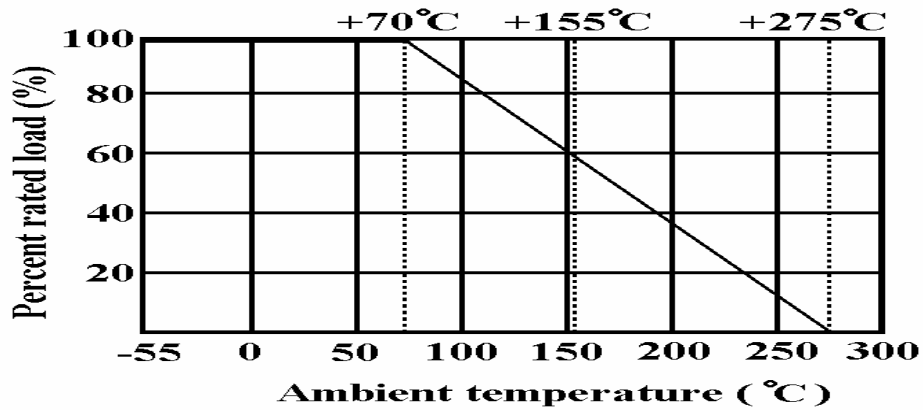

3.3 Nominal resistance :

Effective figures of nominal resistance shall be in accordance with E-24 series, and resistance tolerance shall be shown by table 1.

4. Construction :

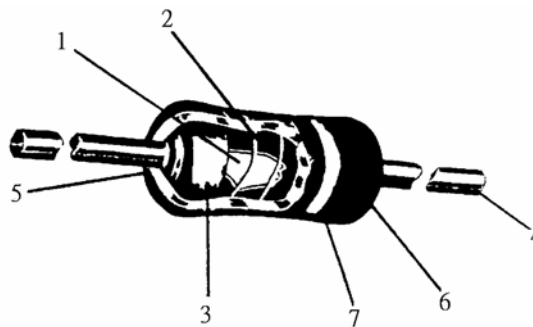

No.	Name	Material
1	Basic Body	Rod Type Ceramics
2	Resistance Wire	Ni-Cr Alloy, Cu-Ni Alloy
3	End Cap	Steel (Tin plated iron surface)
4	Lead Wire	Annealed copper wire coated with tin
5	Joint	By Welding
6	Coating	Insulated & Non-Flame paint (Color : Light Green)
7	Color Code	Non-Flame Epoxy Resin

Wire-Wound Fixed Resistors

5. Characteristics :

Characteristics	Limits	Test Methods (JIS C 5201-1)
DC. Resistance	Must be within the specified tolerance	5.1 The limit of error of measuring apparatus shall not exceed allowable range or 5% of resistance tolerance
Temperature coefficient	± 300 PPM/°C Max. < 20 Ω ± 400PPM/°C	5.2 Natural resistance change per temp. degree centigrade. $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \quad (\text{PPM}/^\circ\text{C})$ R1: Resistance value at room temperature (t1) R2: Resistance value at room temp. plus 100 °C (t2)
Short time overload	Resistance change rate is ± (2% + 0.05 Ω) Max. with no evidence of mechanical damage	5.5 Permanent resistance change after the application of a potential of 2.5 times RCWV for 5 seconds
Terminal strength	No evidence of mechanical damage	6.1 Direct load : Resistance to a 2.5 kgs direct load for 10 secs. in the direction of the longitudinal axis of the terminal leads Twist test : Terminal leads shall be bent through 90 ° at a point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations
Resistance to soldering heat	Resistance change rate is ± (1% + 0.05 Ω) Max. with no evidence of mechanical damage.	6.4 Permanent resistance change when leads immersed to 3.2 to 4.8 mm from the body in 350°C ± 10 °C solder for 3 ± 0.5 seconds.
Solderability	95 % coverage Min.	6.5 The area covered with a new, smooth, clean, shiny and continuous surface free from concentrated pinholes. Test temp. of solder : 245°C ± 3°C Dwell time in solder : 2 ~ 3 seconds


Wire-Wound Fixed Resistors

Wire-Wound Fixed Resistors																	
Characteristics	Limits	Test Methods (JIS C 5201-1)															
Temperature cycling	Resistance change rate is $\pm (2\% + 0.05 \Omega)$ Max. with no evidence of mechanical damage.	7.4 Resistance change after continuous 5 cycles for duty shown below:															
		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Step</th> <th style="text-align: center;">Temperature</th> <th style="text-align: center;">Time</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">$-55^{\circ}\text{C} \pm 3^{\circ}\text{C}$</td> <td style="text-align: center;">30 mins</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">Room temp.</td> <td style="text-align: center;">10~15 mins</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">$+155^{\circ}\text{C} \pm 2^{\circ}\text{C}$</td> <td style="text-align: center;">30 mins</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">Room temp.</td> <td style="text-align: center;">10~15 mins</td> </tr> </tbody> </table>	Step	Temperature	Time	1	$-55^{\circ}\text{C} \pm 3^{\circ}\text{C}$	30 mins	2	Room temp.	10~15 mins	3	$+155^{\circ}\text{C} \pm 2^{\circ}\text{C}$	30 mins	4	Room temp.	10~15 mins
		Step	Temperature	Time													
		1	$-55^{\circ}\text{C} \pm 3^{\circ}\text{C}$	30 mins													
		2	Room temp.	10~15 mins													
		3	$+155^{\circ}\text{C} \pm 2^{\circ}\text{C}$	30 mins													
4	Room temp.	10~15 mins															
Load life in humidity	Resistance change rate is $\pm(5\% + 0.05 \Omega)$ Max. with no evidence of mechanical damage	7.9 Resistance change after 1,000 hours (1.5 hours "on", 0.5 hour "off") at RCWV in a humidity test chamber controlled at $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and 90 to 95 % relative humidity															
Load life	Resistance change rate is $\pm(5\% + 0.05 \Omega)$ Max. with no evidence of mechanical damage	7.10 Permanent resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") at $70^{\circ}\text{C} \pm 2^{\circ}\text{C}$ ambient															

Wire-Wound Fixed Resistors

6. Dimension :


Unit : mm

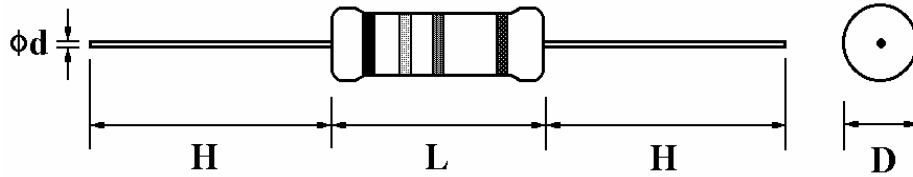

Type	Power Rating	$D \pm 1$	$L \pm 1$	$d \pm 0.05$	$H \pm 2$
KNP	2W-S	5.0 mm	12.0 mm	0.70 mm	25 mm

Painting method:


Welding point, terminal and lead wire, is permissible to be exposed without the outer coated cover. The extent should be within 1/2 of the arc angle.

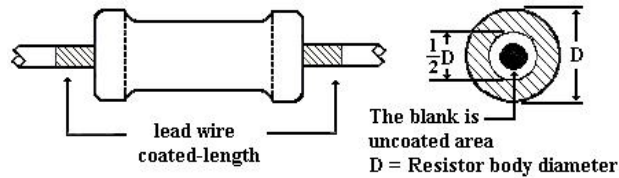

7. Marking :

7.1 Resistor :

Resistors shall be marked with color coding
colors shall be in accordance with JIS C 0802

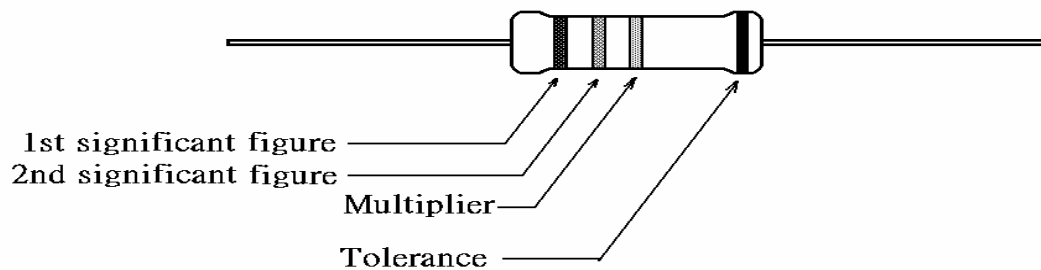

7.2 Label :

Label shall be marked with following items:

- (1) Type and style
- (2) Nominal resistance
- (3) Resistance tolerance
- (4) Quantity
- (5) Lot number
- (6) PPM


Example :

Wire-Wound Fixed Resistors			
Watt :	2W-S	Val :	10E
Q'TY :	1,000	Tol :	5%
Lot :	709012	PPM :	
	ROYALOHM		Pb Free

Wire-Wound Fixed Resistors

8. Packing specification :


8.1 Taping dimension :

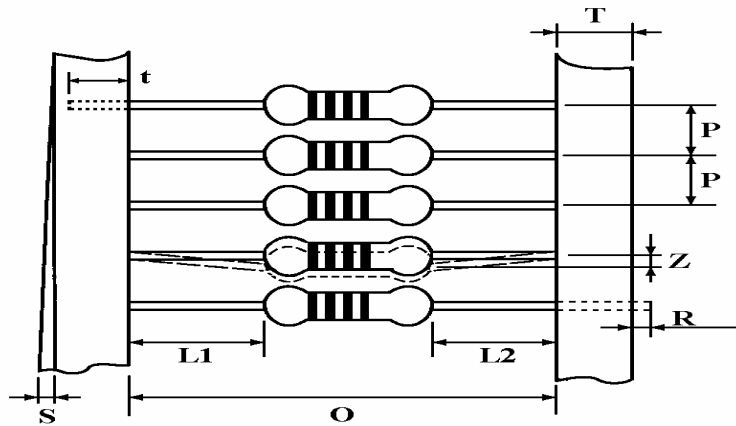

Dimensions (mm)

Type	Style	O	P	L1-L2	T	Z	R	t	S
KNP-200s	PT-52	52 ± 1	5 ± 0.3	1 Max.	6 ± 1	1 Max.	0	4 ± 1	0.5 Max.

8.2 Tape in box packing :

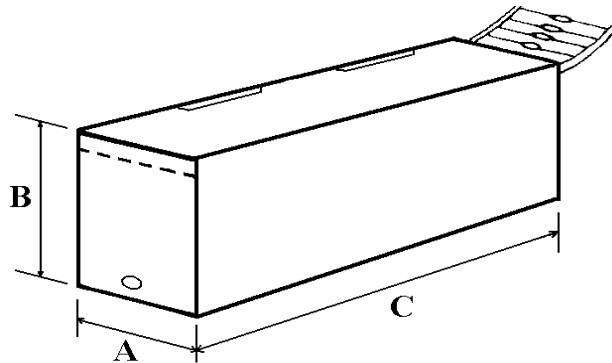

Bandoliers may also be contained in a cardboard box ("Ammopack")


Dimension (mm)

Type	Style	L (C) ± 5	W (A) ± 5	H (B) ± 5	Quantity Per Box (pcs.)
KNP-200s	PT-52	262	86	80	1,000

"Ammopack" is an abbreviation of "ammunition pack"

Wire-Wound Fixed Resistors

8.3 Tape on reel packing :

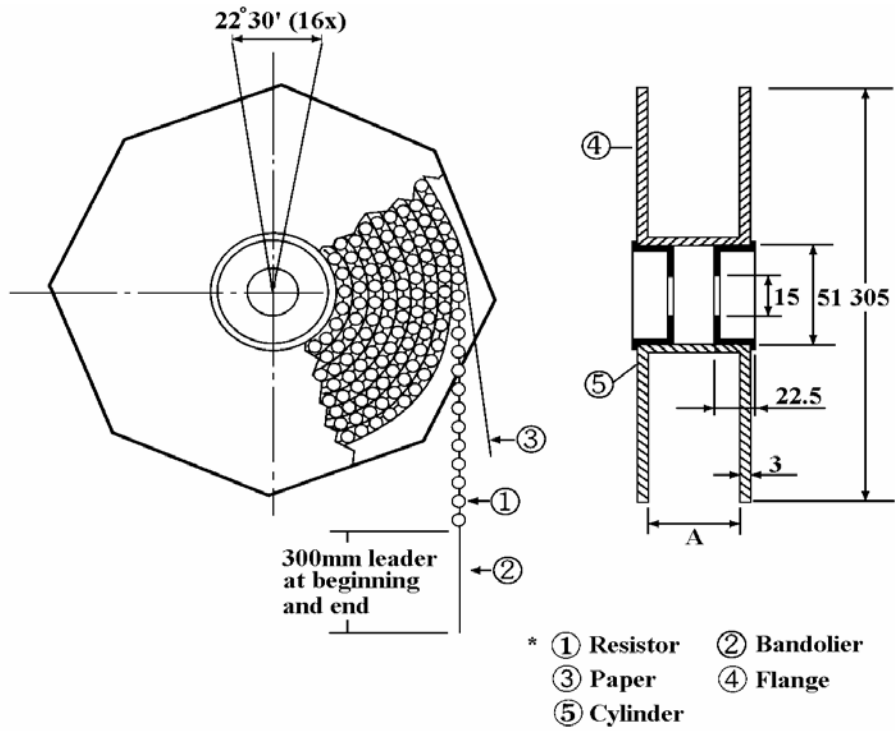

Dimension (mm) :

Type	Style	Across Flange (A)	Quantity Per Reel
KNP-200s	PT- 52	73 ± 2	2,500 pcs.

Part Number System

Explanation of Part Number System (Wire-Wound Fixed Resistors)

1	2	3	4	5	6	7	8	9	10	11	12	13	14
K	N	P	0	2	S	J	0	1	0	0	A	1	0

Product Type:
KNP = KNP Type

Tolerance:
F ~ ± 1%
G ~ ± 2%
J ~ ± 5%
K ~ ± 10%

Packing Type:
A = Tape/Box
T = Tape/Reel
B = Bulk/Box

Special Feature:
0 = Standard Product
I = Non-Inductive Product

Resistance Value:
E-24 series: the 1st digit is "0",
the 2nd & 3rd digits are for
the significant figures of the
resistance and the 4th indicate
the number of zeros following:
"J" ~ 0.1, "K" ~ 0.01
Ex.: 4.7Ω ~ 47J, 4.7KΩ ~ 472
E--96 Series: the 1st to 3rd digits
are significant figures of
resistance and the fourth
one denotes number of zeros
following:
Ex.: 1.33KΩ = 1331

Packing Quantity:
1 = 1,000pcs
2 = 2,000pcs
A = 500pcs
B = 2,500pcs
0 = for Bulk/Box
packing

Wattage:

<p>Normal size:</p> <p>1W = 1W 2W = 2W 3W = 3W 5W = 5W 7W = 7W 8W = 8W 9W = 9W AW = 10W</p>	<p>Small size:</p> <p>1S = 1W-S 2S = 2W-S 3S = 3W-S 4S = 4W-S 5S = 5W-S 6S = 6W-S 7S = 7W-S 8S = 8W-S 9S = 9W-S AS = 10W-S</p>
--	---

Addition Information:
0 = PT-52mm
8 = PT-58mm
9 = PT-64mm

Sample: KNP 2W-S +/- 5% 10Ω T/B 1,000 PT-52mm → KNP02SJ0100A10