

# ROYALOHM

*C O N F I D E N T I A L   D O C U M E N T*

SPECIFICATION FOR APPROVAL

**TRELIK COMERCIAL IMPORTADORA LTD.**

Description : Cement Fixed Resistors

Royalohm Part no.: PRWC7WJxxxxB00 (PRWC 7W +/-5% B/B)

Approved by

**Parts corresponding to RoHS Compliant: 2005-Apr.-1**

Royal Electronic Factory (Thailand) Co., Ltd.  
20/1-2 Moo 2 Klong-Na, Muang  
Chachoengsao 24000, Thailand  
Tel: +66-38-822404-8  
Fax: +66 38-981190 / 823765  
E-mail Address: Export sales: [Export@royalohm.com](mailto:Export@royalohm.com)  
Local sales: [Local@royalohm.com](mailto:Local@royalohm.com)  
<http://www.royalohm.com>  
P.O. Box 251 Klongchan, Bangkok 10240, Thailand

Approved	Checked	Prepared
Mr. Jack Lin	Mr.S. Polthanasan	Ms. T. Suparuch

Issued Date: 2010/06/19



<b>Customer: TRELIK COMERCIAL IMPORTADORA LTD.</b>	<b>Part No.: PRWC7WJxxxxB00</b>
--	---------------------------------

1. Scope:

This specification for approval relates to Cement Fixed Resistors manufactured by ROYALOHM 's specifications.

2. Type designation:

The type designation shall be in the following form:

( Ex.)	PRWC	7W	J	6.8KΩ
	Type	Power Rating	Resistance Tolerance	Nominal Resistance

3. Ratings:

Ratings shall be shown in the table 1.

Table 1

Type	PRWC
Rated Power	7W at 70 □
Rated Ambient Temp.	70 □
Operating Temp. Range	-55 □ --- +155 □
Resistance Tolerance	± 5%
Wire-wound Resistance Range	1Ω----200Ω
Power Film Resistance Range	201Ω----100KΩ

3.1 Power rating:

Resistors shall have a power rating based on continuous full load operation at an ambient temperature of 70 □

3.2 Voltage rating:

Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial line frequency and waveform corresponding to the power rating , as determined from the following formula:

$$RCWV = \sqrt{P \times R}$$


Were : RCWV = Rated DC or RMS AC continuous working voltage at commercial-line frequency and waveform (volt)

P = Power Rating (watt)


R = Nominal Resistance (ohm)

### Cement Fixed Resistors


Heat Rise Chart

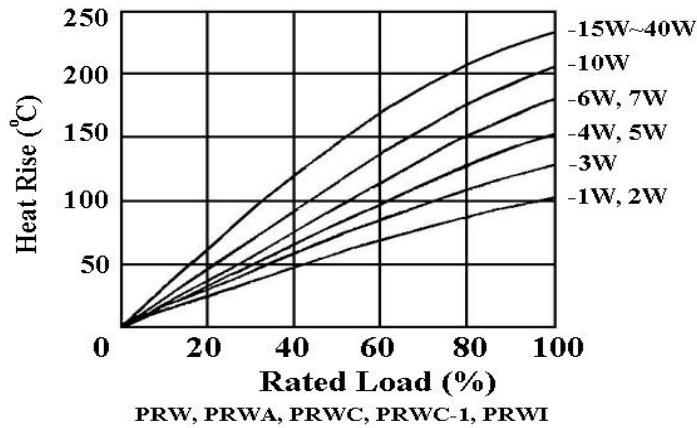

Derating Curve

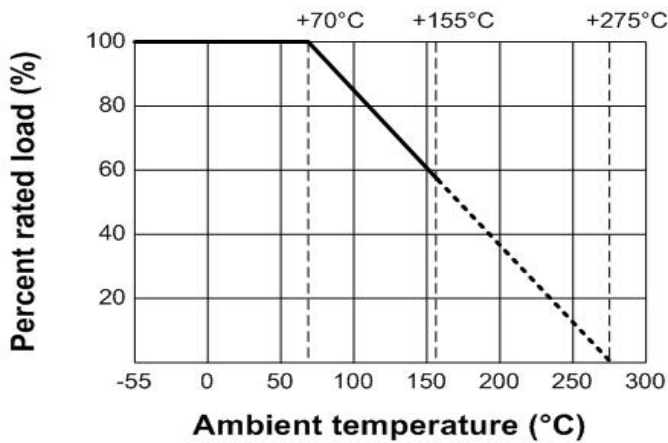

4. Construction:

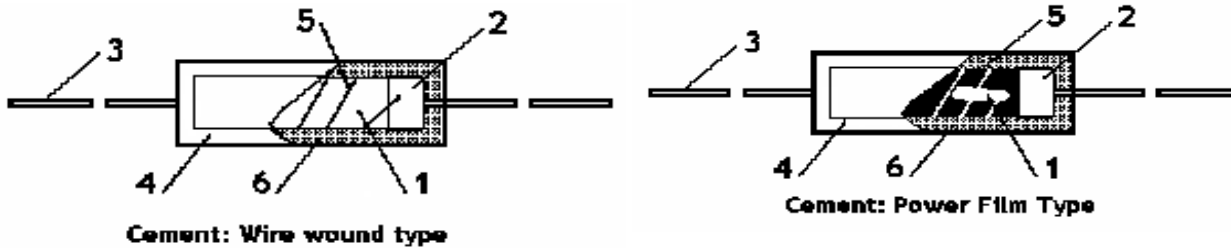

Confirmation List of Material

No.	Subpart Name	Material	Material Generic Name	Remark
1	Body	Rod Type Ceramics	Al <sub>2</sub> O <sub>3</sub> , SiO <sub>2</sub>	
2	End Cap	Tin plated iron surface	Tin : 5%, Iron : 95%	
3	Lead	Annealed copper wire	Tin-Plated Copper wire	
4	Ceramic Case	Ceramic	Al <sub>2</sub> O <sub>3</sub> , SiO <sub>2</sub>	
5	Resistance wire	Cu-Ni Alloy / Ni-Cr Alloy	Cu-Ni Alloy / Ni-Cr Alloy	
	Resistance film	Metal Oxide Film	Metal Oxide Film	
6	Filling Materials	Quartz mixed sand	SiO <sub>2</sub>	


<b>Cement Fixed Resistors</b>		
5. Characteristic :		
Characteristics	Limits	Test Methods ( JIS C 5201-1 )
Dielectric withstanding voltage	No evidence of flashover, mechanical damage, arcing or insulation break down	Resistors shall be clamped in the trough of a 90° metallic V-block and shall be tested at AC potential respectively for 60 +10/ -0 secs. (Sub-clause 4.7)
Temperature coefficient	± 350 PPM/□ Max. □20 Ω ± 400 PPM/□	Natural resistance change per temp. degree centigrade. $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (PPM/□)}$ R1: Resistance value at room temperature (t1) R2: Resistance value at room temp. plus 100 □ (t2) (Sub-clause 4.8)
Short time overload	Resistance change rate is ± (5% + 0.05Ω) Max. with no evidence of mechanical damage	Permanent resistance change after the application of a potential of 2.5 times RCWV for 5 seconds (Sub-clause 4.13)
Terminal strength	No evidence of mechanical damage	<b>Direct load :</b> Resistance to a 2.5 kgs direct load for 10 secs. in the direction of the longitudinal axis of the terminal leads <b>Twist test :</b> Terminal leads shall be bent through 90 ° at a point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations (Sub-clause 4.16)
Solderability	95 % coverage Min.	The area covered with a new , smooth clean , shiny and continuous surface free from concentrated pinholes. Test temp. of solder : 245□ ± 5□ Dwell time in solder : 2 to 3 secs. (Sub-clause 4.17)
Soldering temp. reference	Electrical characteristics shall be satisfied. Without distinct deformation in appearance. (95 % coverage Min.)	The leads immersed into solder bath to 3.2 to 4.8 mm. from the body. Permanent resistance change shall be checked. <u>Wave soldering condition: (2 cycles Max.)</u> Pre-heat : 100 ~ 120 , 30 ± 5 sec. Suggestion solder temp.: 235 ~ 255 , 10 sec. (Max.) Peak temp.: 260 □ <u>Hand soldering condition:</u> Hand Soldering bit temp. : 380 ± 10 □ Dwell time in solder : 3 +1/-0 sec.

<b>Cement Fixed Resistors</b>																	
Characteristics	Limits	Test Methods ( JIS C 5201-1 )															
Resistance to soldering heat	Resistance change rate is $\pm (1\% + 0.05\Omega)$ Max. with no evidence of mechanical damage	Permanent resistance change when leads immersed to 3.2 to 4.8 mm from the body in $350 \pm 10$ °C solder for $3 \pm 0.5$ secs. (Sub-clause 4.18)															
Temperature cycling	Resistance change rate is $\pm (2\% + 0.05\Omega)$ Max. with no evidence of mechanical damage	Resistance change after continuous 5 cycles for duty shown below: <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Step</th> <th style="text-align: center;">Temperature</th> <th style="text-align: center;">Time</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;"><math>-55 \pm 3</math> °C</td> <td style="text-align: center;">30 mins</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">Room temp.</td> <td style="text-align: center;"><math>10 \pm 15</math> mins</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;"><math>+155 \pm 2</math> °C</td> <td style="text-align: center;">30 mins</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">Room temp.</td> <td style="text-align: center;"><math>10 \pm 15</math> mins</td> </tr> </tbody> </table> (Sub-clause 4.19)	Step	Temperature	Time	1	$-55 \pm 3$ °C	30 mins	2	Room temp.	$10 \pm 15$ mins	3	$+155 \pm 2$ °C	30 mins	4	Room temp.	$10 \pm 15$ mins
Step	Temperature	Time															
1	$-55 \pm 3$ °C	30 mins															
2	Room temp.	$10 \pm 15$ mins															
3	$+155 \pm 2$ °C	30 mins															
4	Room temp.	$10 \pm 15$ mins															
Load life in humidity	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Resistance value</th> <th style="text-align: center;">R/R</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">Wire-wound</td> <td style="text-align: center;"><math>\pm 5\%</math></td> </tr> <tr> <td style="text-align: center;">Power film : <math>\leq 100K\Omega</math></td> <td style="text-align: center;"><math>\pm 5\%</math></td> </tr> <tr> <td style="text-align: center;"><math>&gt; 100K\Omega</math></td> <td style="text-align: center;"><math>\pm 10\%</math></td> </tr> </tbody> </table>	Resistance value	R/R	Wire-wound	$\pm 5\%$	Power film : $\leq 100K\Omega$	$\pm 5\%$	$> 100K\Omega$	$\pm 10\%$	Resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") in a humidity test chamber controlled at $40 \pm 2$ °C and 90 to 95 % relative humidity (Sub-clause 4.24.2.1)							
Resistance value	R/R																
Wire-wound	$\pm 5\%$																
Power film : $\leq 100K\Omega$	$\pm 5\%$																
$> 100K\Omega$	$\pm 10\%$																
Load life	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Resistance value</th> <th style="text-align: center;">R/R</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">Wire-wound</td> <td style="text-align: center;"><math>\pm 5\%</math></td> </tr> <tr> <td style="text-align: center;">Power film : <math>\leq 100K\Omega</math></td> <td style="text-align: center;"><math>\pm 5\%</math></td> </tr> <tr> <td style="text-align: center;"><math>&gt; 100K\Omega</math></td> <td style="text-align: center;"><math>\pm 10\%</math></td> </tr> </tbody> </table>	Resistance value	R/R	Wire-wound	$\pm 5\%$	Power film : $\leq 100K\Omega$	$\pm 5\%$	$> 100K\Omega$	$\pm 10\%$	Permanent resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") at $70 \pm 2$ °C ambient (Sub-clause 4.25.1)							
Resistance value	R/R																
Wire-wound	$\pm 5\%$																
Power film : $\leq 100K\Omega$	$\pm 5\%$																
$> 100K\Omega$	$\pm 10\%$																

### Cement Fixed Resistors

6. Dimension :


Unit : mm

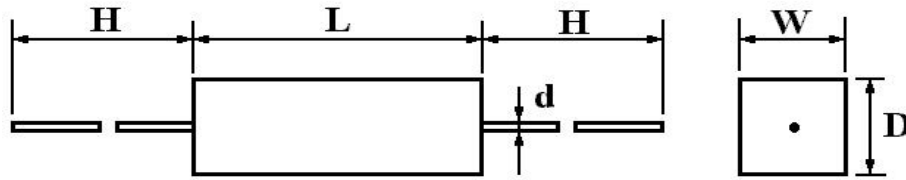

Type	Rating Wattage	$W \pm 1$	$D \pm 1$	$L \pm 1$	$d \pm 0.05$	$H \pm 5$
PRWC	7 W	9	9	25	0.75	35

7. Marking :

Ex.



**Code description and regulation**

1. Company mark or customer designated mark. Company mark : ROYAL

2. Date manufactured. First code :
- |  |                   |                   |
|--|-------------------|-------------------|
|  | 5 : The year 2005 | 8 : The year 2008 |
|  | 6 : The year 2006 | 9 : The year 2009 |
|  | 7 : The year 2007 | 0 : The year 2010 |
- Second code :
- |              |            |               |
|--------------|------------|---------------|
| 1 : January  | 5 : May    | 9 : September |
| 2 : February | 6 : June   | O : October   |
| 3 : March    | 7 : July   | N : November  |
| 4 : April    | 8 : August | D : December  |
- Third code :
- 1 : First 10 days of a month
  - 2 : Second 10 days of a month
  - 3 : Third 10 days of a month

3. W marking for Wire wound type

P marking for Power film type

4. Wattage rating.

5. Nominal resistance value.

6. Resistance Tolerance.

J :  $\pm 5\%$

K :  $\pm 10\%$

Color of marking: Black ink

**Part Number System**

**Explanation of Part Number System  
( Cement Fixed Resistors )**

<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>	<b>11</b>	<b>12</b>	<b>13</b>	<b>14</b>
P	R	W	C	7	W	J	P	6	8	2	B	0	0

**Resistor Type:**  
 PRW0 = PRW  
 PRWA = PRWA  
 PRWC = PRWC  
 PWC1 = PRWC-1  
 PRM0 = PRM  
 PRMA = PRMA  
 PRMB = PRMB  
 PRS0 = PRS  
 PRT0 = PRT  
 PRU0 = PRU  
 PZ1A = PRZA-1  
 PZ2A = PRZA-2  
 PZ3A = PRZA-3  
 PRZC = PRZC  
 PRZD = PRZD  
 PRVA = PRVA  
 PRVB = PRVB

**Wattage:**  
 1W = 1W  
 2W = 2W  
 3W = 3W  
 4W = 4W  
 5W = 5W  
 6W = 6W  
 7W = 7W  
 AW = 10W  
 BW = 11W  
 FW = 15W  
 HW = 17W  
 20 = 20W  
 25 = 25W  
 30 = 30W  
 40 = 40W

**Tolerance:**  
 J ~ ± 5%  
 K ~ ± 10%

**Resistance Value:**  
 E-24 series: the 1<sup>st</sup> digit to denote production type of the product:  
 W = Wire wound type  
 P = Power film type  
 The 2<sup>nd</sup> and 3<sup>rd</sup> digits are for the significant figures of the resistance and the 4<sup>th</sup> digit denote number of zeros following  
**Decimal point is expressed by:**  
 "J" ~ 0.1, "K" ~ 0.01  
 Ex.: 4.7Ω ~ 47J, 4.7KΩ ~ 472

**Packing Quantity:**  
 A = 500pcs  
 0 = Bulk/Box

**Packing Type:**  
 A = Tape/Box  
 B = Bulk/Box

**Special Feature:**  
 0 = Standard product  
 I = Non-Inductive

Sample: PRWC 7W +/- 5% Power film 6.8KΩ B/B → PRWC7WJP682B00



## Cement Fixed Resistor

### Environment Related Substance

This product complies to EU RoHS directive, EU PAHs directive, EU PFOS directive and Halogen free.

Ozone layer depleting substances.

Ozone depleting substances are not used in our manufacturing process of this product.

This product is not manufactured using Chloro fluorocarbons (CFCs), Hydrochlorofluorocarbons (HCFCs), Hydrobromofluorocarbons (HBFCs) or other ozone depleting substances in any phase of the manufacturing process.

### Storage Condition

The performance of these products, including the solderability, is guaranteed for a year from the date of arrival at your company, provided that they remain packed as they were when delivered and stored at a temperature of  $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$  and a relative humidity of  $60\%RH \pm 10\%RH$

Even within the above guarantee periods, do not store these products in the following conditions. Otherwise, their electrical performance and/or solderability may be deteriorated, and the packaging materials (e.g. taping materials) may be deformed or deteriorated, resulting in mounting failures.

1. In salty air or in air with a high concentration of corrosive gas, such as  $\text{Cl}_2$ ,  $\text{H}_2\text{S}$ ,  $\text{NH}_3$ ,  $\text{SO}_2$ , or  $\text{NO}_2$
2. In direct sunlight